


Cannon

Ultra-Broadband Light Source

Del Mar Photonics ultra-broadband light source, Cannon, provides a turnkey, portable source of broadband laser pulses without requiring any user-adjustments to the fiber coupling.

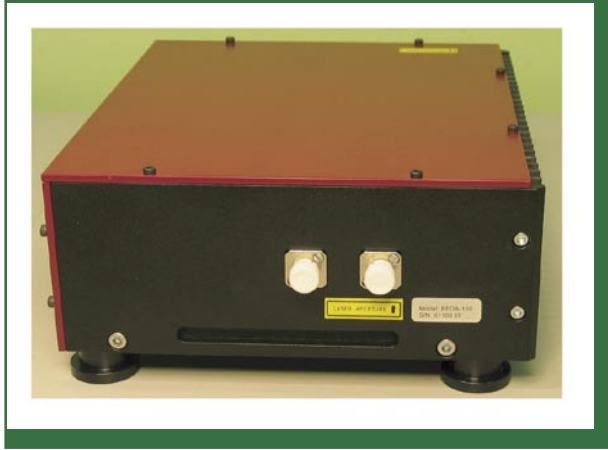

SPECIFICATION


Optical Spectrum covers:	1000 - 1900 nm
Average Output Power:	> 80 mW
Repetition Rate:	50 - 70 MHz
Head size:	180x210x70
Optional:	Spectral bandwidth Output power

APPLICATION

- Telecommunication
- Optical Coherence Tomography
- Optical Component Testing
- Fluorescence Spectroscopy of Biological Markers

Using standard fiber components, fiber based femtosecond lasers offer robust and stable operation without the need for constant realignment.


Typical output spectrum

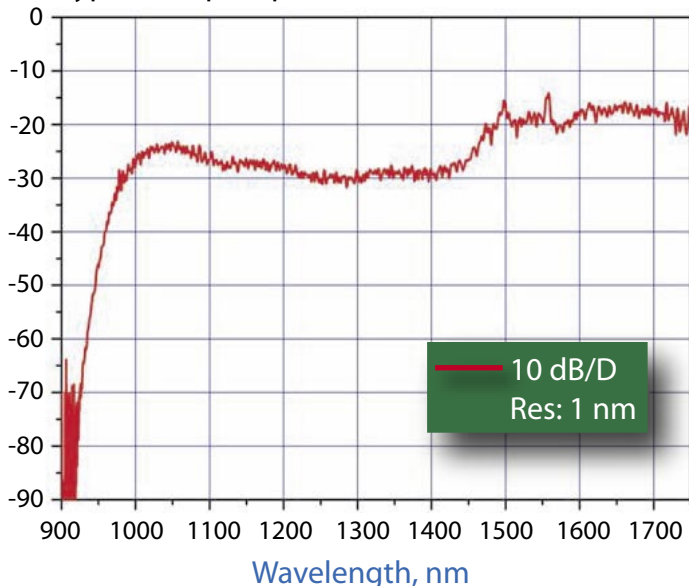

REFERENCES

- K. Bizheva, B. Povazay, B. Hermann, H. Sattmann, W. Drexler, M. Mei, R. Holzwarth, T. Hoelzenbein, V. Wacheck, H. Pehamberger, *Compact, broad-band fiber laser for sub-2- μ m axial resolution optical coherence tomography in the 1300-nm wavelength region*, Opt. Lett, **28**, 9 (2003).
- K. Bizheva, B. Povazay, B. Hermann, H. Sattmann, M. Mei, R. Holzwarth, M. Kempe, B. Zimmermann, H. Reitsamer, A. F. Fercher and W. Drexler, *Imaging brain morphology with ultrahigh resolution optical coherence tomography*, EBIOS (2003).
- B. Povazay, K. Bizheva, A. Unterhuber, B. Hermann, H. Sattmann, W. J. Wadsworth, J.C. Knight, P. St. J. Russel, M. Mei, R. Holzwarth, R. Holzwarth, T. Hoelzenbein, A. F. Fercher and W. Drexler, *Ultrahigh resolution optical coherence tomography in the visible and 1300 nm wavelength region*, ECBO.

DEL



MAR PHOTONICS

4119 Twilight Ridge, San Diego, CA 92130, USA Tel:: (858) 876-3133 Fax:: (858) 630-2376
E-mail:: sales@dmphotonics.com URL:: www.dmphotonics.com